



BECO | MODIFICATIONS



Stairs and walk-way for

VOLVO

excavators



Smart. Solid.

FOLDABLE WALK-WAY FOR VOLVO EXCAVATORS

- Available for crawler excavators and wheeled excavators.
- Stainless steel supports and galvanized step.
- Foldable to reduce transport width.




3 available options:

- Cabin only (length = 900 mm).
- Full length cabin side.
- Full length both sides.

FOLDING STAIRS FOR VOLVO EXCAVATORS


Provides safe 3-point access to the cab of the excavator.

- Stairs can be operated from the ground and from the cabin.
- Equipped with safety switch; when the stairs are down, the excavator cannot be operated.
- The electro-hydraulic stairs folds away high above the ground to reduce the risk of damaging the stairs.
- Integrated with the existing walk-way (EC750E, EC950F)
- Available for different models of Volvo excavators.

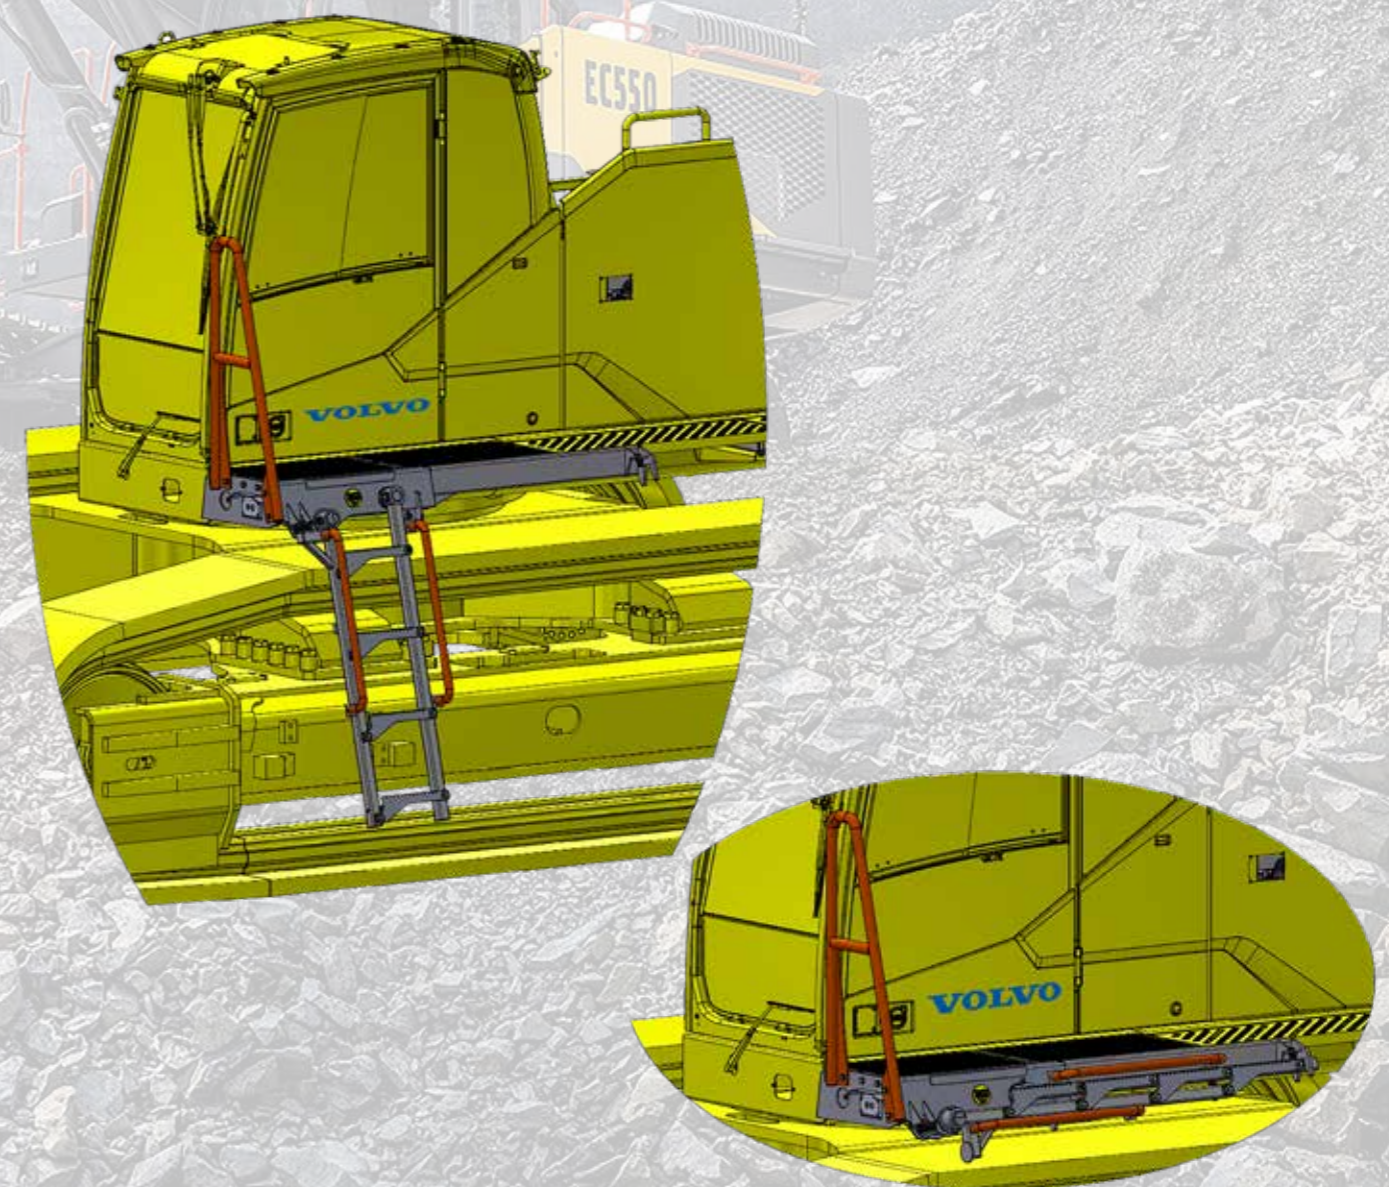

FULL WALK-WAY + STAIRS FOR VOLVO EXCAVATORS

- Walk-way with handrail for safe access to the upper structure.
- Stairs for safe 3-point access to the walk-way and cabin of the excavator.
- Stairs can be operated from the ground and from the cabin.
- Equipped with safety switch; when the stairs are down, the excavator cannot be operated.
- The electro-hydraulic stairs folds away high above the ground to reduce the risk of damaging the stairs.
- Mainly intended for the EC750E and EC950F, but also applicable to other excavator models.
- Optional extra handrail on top of the superstructure.

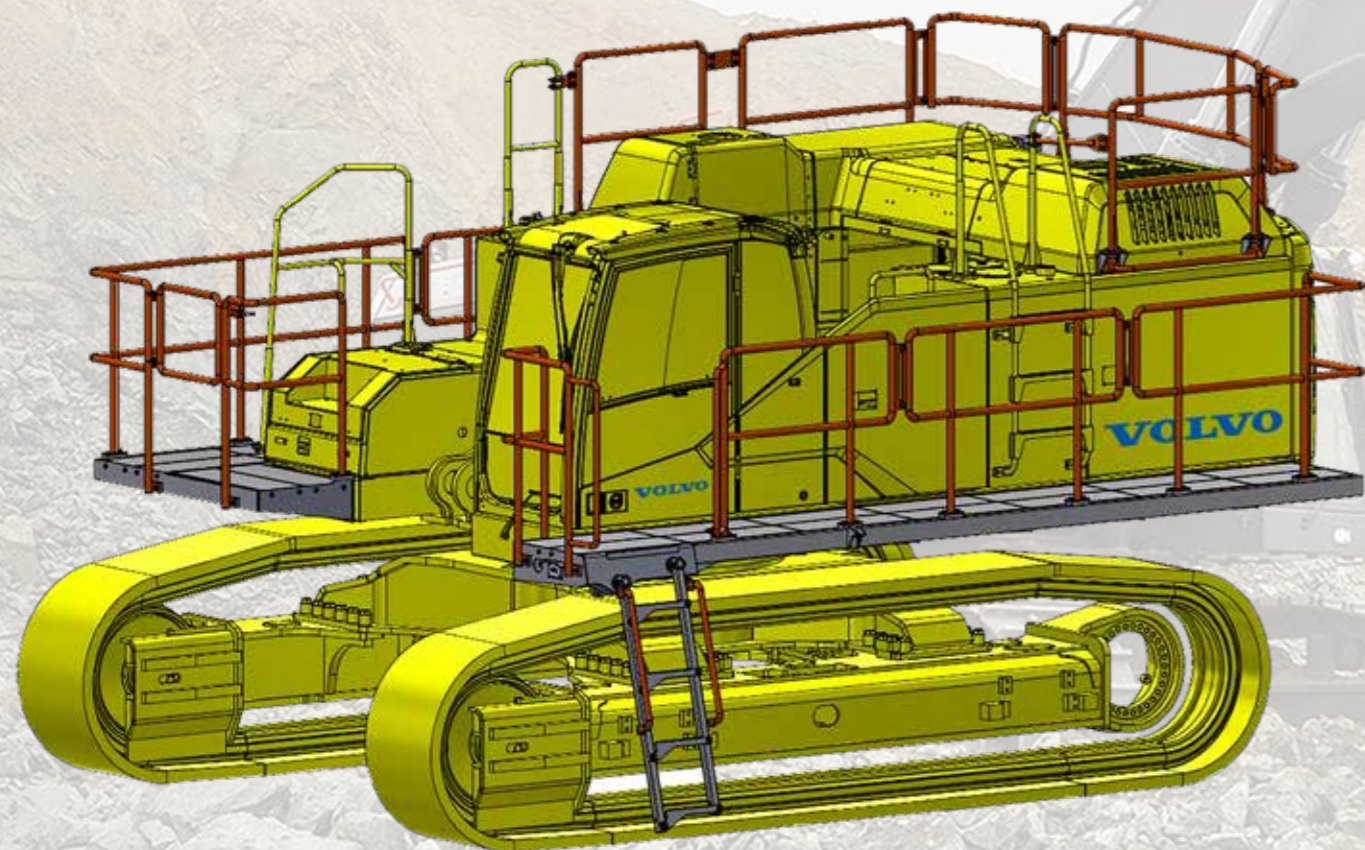


FOPS GUARD FOR VOLVO EXCAVATORS

Provides safe 3-point access to the cab of the excavator.

- Protection for cab and operator during demolition work
- ISO10262 Level II tested
- Front guard upper part completely insertable under the FOPS roof
- Vertical and horizontal crossbars of the front guard are angled to provide clear line of sight for the operator
- Installation on existing cab mounting points (no welding or drilling required)
- Mounting points for front working lights under the roof (up to 4 lights)
- Approx. 110 mm height increase
- Weight: 190 kg

Suitable for: EC140E and up, ECR145E - ECR355E, EW160E and up, EWR150E - EWR170E

*FOPS: Falling Objects Protective Structure

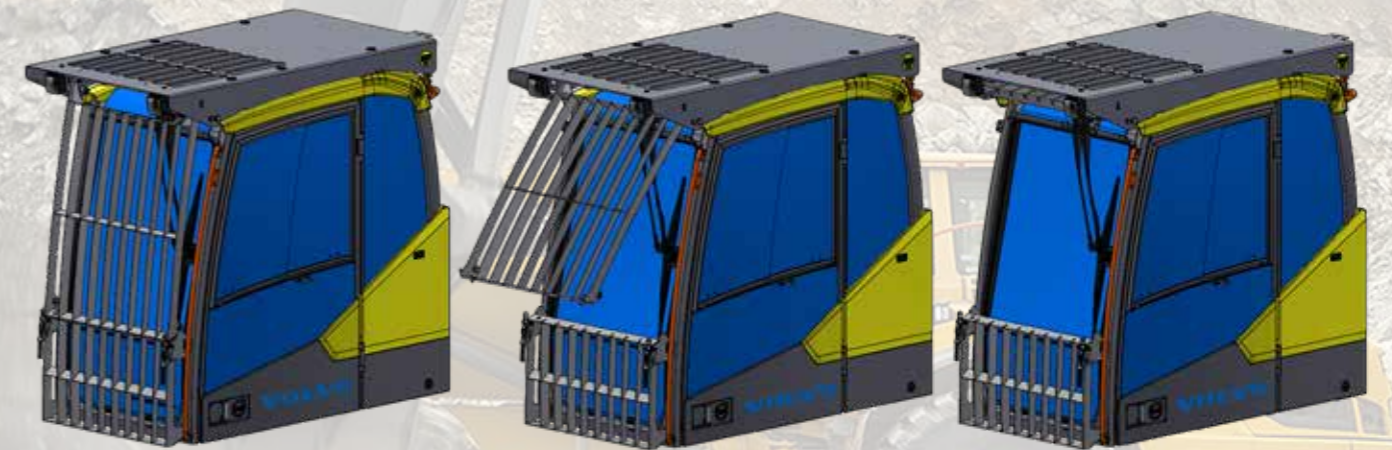

© 2022 BV Beco. All rights reserved.

The design and technical specifications of the products in this documentation may be in further development and may deviate from the current properties. Subject to change, typesetting and printing errors. Deliveries in accordance with the terms and conditions of the Metaalunie, registered with the Clerk of the District Court of Rotterdam, as these read according to the last text filed.

